


POWER

The Power is designed for the workers that need the toughness of a boot but require the ankle mobility of a shoe. Ideal for drivers and people walking big distances on tough terrain. Built on the **ADAPT™** sole technology and **articulatedFIT** upper the Power is designed to improve adaption to rough surfaces and is combined with a lightweight design to assist in minimising fatigue and maximising performance.

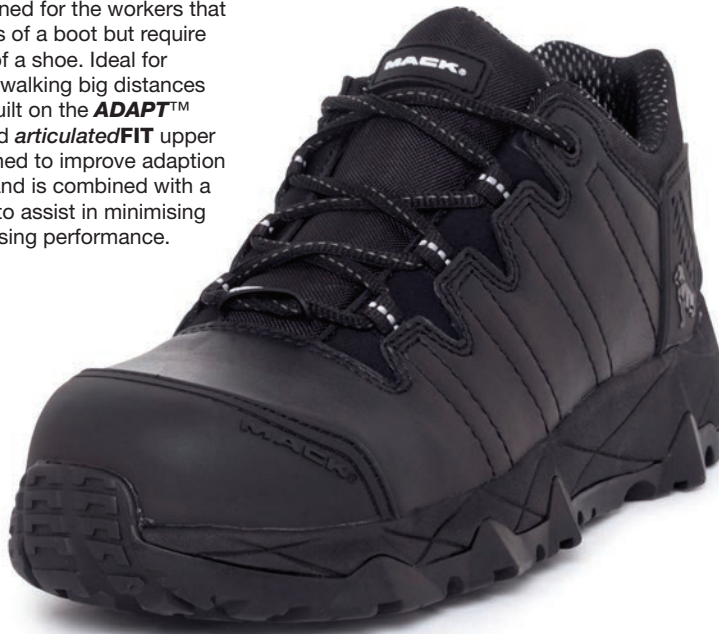

SIZES
4-13
1/2 SIZES 6.5-10.5
WEIGHT
605^g

COLOURS



PERFORMANCE SYSTEMS

SYST-M®

Design philosophy that integrates series of technologies and design features to provide movement specific support and flexibility.

ADAPT™

Sole unit technology designed to maximise adaption to uneven terrain and reduce injury risks.

articulatedFIT™

Upper design system to allow the natural movement of the foot and ankle from heel strike to toe-off.

asymBEVEL™

Heel shaped to match the natural heel strike position during walking to maximise contact area and provide a smooth ride.

OrthoLite®

Breathable memory foam insole that moulds to the foot providing a customised fit and helping to reduce in-shoe friction.

decoupleGROOVE™

Flex groove along the length of the sole to provide flexibility to allow a smooth transition from initial contact to foot flat and improve terrain adaption.

softboard™

Constructed on cushioned foam insole board for a smooth ride.

radiatorTECH™

Manufacturing technique used to improve the breathability of leather and lining materials.

endurelon™

Specifically compounded phylon midsole to improve cushioning rebound characteristics and durability.

WIDEcap

Wide anatomical shaped toecap to reduce rubbing and nerve impingement.

FITCHECK

Registered fitting guide printed on the insole to indicate the correct spacing between the end of the longest toe and the toecap.

SAFETY SYSTEMS

COMPOSITE Toecap

Lightweight, metal-free, nonconductive, insulating and airport friendly safety toecap that complies with (AS/NZS 2210.3), (EN-ISO 20345) and (ASTM F2413-11) standards.

slipRESIST-C

Sole slip resistant to soap (SLS) on ceramic tiles and glyceryl on steel plate.

300°C HeatResistant

Nitrile rubber sole that is hard wearing and resistant to extreme heat.

fueloilRESIST

Sole resists breakdown to fuel oil.

ANTI-STATIC

Minimises static electricity build up for safety in volatile environments.

H₂O RESISTANT

Footwear designed to shed water.

ScuffCAP

Improves durability in high wear zones.

LOWcatchsole

Low profile sole at the toe to reduce the risk of tripping.

REFLECTIVE

Upper contains retro-reflective material to improve visibility in low light conditions.

SLIPS

- ## TRIPS & FALLS

- ## SPRAINS

- ## COMBUSTIBLE MATERIALS

- ## HOT CONTACT

- # PRODUCT DETAILS

APPROVED STANDARDS

 - AS/NZS 2210.3 (Class I S1 SRC HRO)
 - EN – ISO 20345 (S1 SRC HRO)
 - ASTM F2413 – 11 (M/I/75/C/75/SD)

OUTSOLE: Nitrile Rubber

TOECAP: Composite

UPPER: Full Grain Leather

PRODUCT CODES:
xxx represents sizing i.e. size 12 is 120 and size 9.5 is 095

BLACK BOOT CODE:
MKPOWER-BBfxxx

The diagram is a 2x2 matrix with a grid of dotted lines. The vertical axis is labeled 'HIGH ARCH' at the top and 'LOW ARCH' at the bottom, with a foot icon at the top. The horizontal axis is labeled 'NARROW' on the left and 'WIDE' on the right, with a foot icon on the right. A black sneaker is placed in the top-right quadrant, with a white box containing the word 'POWER' below it.

	NARROW	WIDE
HIGH ARCH		POWER (Sneaker)
LOW ARCH		

	SLIPPERY/WET	
SMOOTH		UNEVEN
	MUDDY/CONTAMINATED	

AS/NZS 2210 Australian /New Zealand Standards
EN - ISO 20345 European Standards
ASTM F2413 American Standards