


Howard Leight® Laser Lite®

Product Information

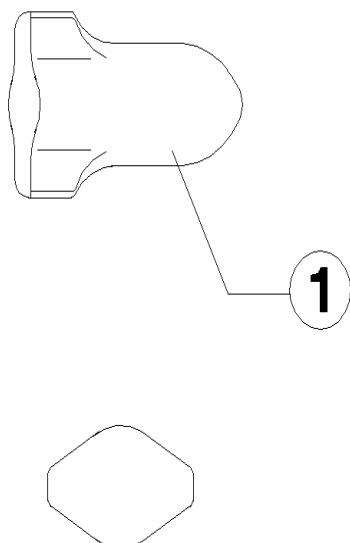

Product Range

Article	Packaging Type	Part No.	Size
Howard Leight Laser Lite	1 – Pair Pack	LL-1/LL-30	N/A

SAP Description

33 011 05 (LL-1)	Howard Leight Laser Lite (uncorded)
33 011 06 (LL-30)	Howard Leight Laser Lite (corded)

Product Description

Part Listing	Material	Color
1 Plug	Polyurethane Foam	Yellow & Magenta

Nominal Dimensions

Diameter	Length	Weight
0.64"/16.26mm	1.05"/26.67mm	0.016 oz./0.48g

Storage Case/Material	Cord Length/Material
Bag/Polyethylene	28"/ 711.2mm/PVC

EAN-UPC

	UPC	EAN (BX)	EAN (CS)
LL-1	033552002031	0335523011050	10335523011057
LL-30	033552002215	0335523011067	10335523011064

Howard Leight® Laser Lite®

Product Information

Product Range

Sales units	Box	200(-1)/100 (-30) Pairs
	Case	10 Boxes
	Pallet	45 CS

Dimensions

Box	L-8"/H-7.75"/D-5.1"
Case	L-25.6"/H-8.1"/D-16.8"
Pallet	L-51"/H-91"/D-44"

Weight

Box	LL1-.89lb(.40kg) LL30-.955lb(.43kg)
Case	10.56lb/4.8kg(-1) 11.27lb/5.12kg(-30)
Pallet	575lb/261.36kg (-1) 620lb/288kg (-30)

Material

Box	Cardboard
Case	Corrugated Cardboard

Customs Tariffs

3926 90

Country of Origin

United States (-1)
Mexico (-30)

Temperature Operations Range

-26.1°C to +60°C/-15°F to + 140°F

National Stocking Number (NSN)

N/A

Regulatory Requirements

Howard Leight® Laser Lite® is tested according to EN 352-2:1993 at BIA.

Region - Europe		Certificate #0951095								
Frequency Hz		63	125	250	500	1000	2000	4000	8000	SNR Value
Mean Value, dB		33.4	34.1	35.5	37.6	34.9	35.7	42.5	44.1	35 dB
Standard Deviation, dB		4.6	4.7	4.6	4.1	5.0	2.8	2.9	4.2	
Assumed Protection, dB		28.8	29.4	30.9	33.5	29.9	32.9	39.6	39.9	
H = 34 dB M = 32 dB		L = 31 dB								

Howard Leight® Laser Lite® is tested according to ANSI S3.19-1974 at Howard Leight Industries.

Region - USA										
Frequency Hz	125	250	500	1000	2000	3150	4000	6300	8000	NRR Value
Mean Value, dB	36.8	38.0	40.4	41.1	40.1	44.4	48.5	46.4	45.8	32 dB
Standard Deviation, dB	4.0	4.5	5.5	4.0	2.7	4.5	4.1	5.4	5.2	
Canada Class* A (L)							*CSA Z94.2-1994			

Howard Leight® Laser Lite® is tested according to AS/NZS 1270:2002 at Challis Consulting Pty Ltd.

Region - Australia	Standardsmark License SMK1579								
Frequency Hz	125	250	500	1000	2000	4000	8000	SLC ₈₀ Value	
Mean Value, dB	24.4	23.6	25.6	26.5	32.3	42.0	42.5	25 dB	
Standard Deviation, dB	6.9	5.9	5.5	5.4	4.3	4.7	6.7		
Mean-Minus-Std. Dev., dB	17.5	17.7	20.1	21.1	28.0	37.3	35.8		
Class 4 Rating									